

HITACHI® POWER TOOLS

Air Compressors
 2 hp - Twin Tank



EC12

Line regulator with gauge. Direct drive electric motor. Suction cup feet. O-Ring on draincock resists stripping. Vertically stacked twin tanks. Air displacement 8.8 cfm. 7A. 3450 rpm. Oil lube single piston compressor. Recovery time 14 seconds. Start/stop control 100/125. Tank cap. 4.3 gal. 75 dB(A). Wt. 60 lbs.

No.	Model No.	Free Air Delivered @40 psi cfm	Free Air Delivered @90 psi cfm	Free Air Delivered @100 psi cfm
/911-EC12	EC12	4.2	4.1	3.6

HITACHI POWER TOOLS

Air Compressors
 1½ HP




Line regulator with gauge. Direct drive electric motor. Suction cup feet. O-Ring on draincock resists stripping. Vertical tank. Air displacement 7.1 cfm. 3450 rpm. Oil lube single piston compressor. 13.5 amps. Recovery time 14 seconds.

Stop/start control 100/125. Tank cap. 5.8 gal. Wt. 49 lbs. Can be used for light use, such as framing nailers, roofing nailers, light duty nailers/staplers, normal use staplers and spray painting.

No.	Model No.	Free Air Delivered @40 psi cfm	Free Air Delivered @90 psi cfm	Free Air Delivered @100 psi cfm
/911-EC10SC	EC10SC	4.9	3.6	3.5

COUPLERS & PLUGS

Series ¼"

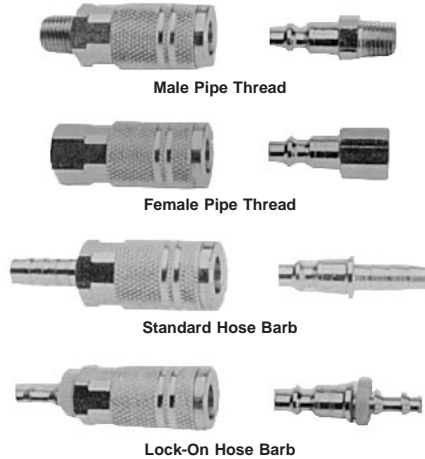

Male Pipe Thread

Female Pipe Thread

Standard Hose Barb

Lock-On Hose Barb

Couplers. Plated steel. Hardened steel balls and stainless steel springs.

Couplers

No.	No.	Size In.	Desc.
Male Pipe Thread			
/910034	910034	¼	Steel
/910036	910036	¾	Steel
Female Pipe Thread			
...C20	910026	¼	Steel
...C20-23	910028	¾	Steel
Standard Hose Barb			
/910037	910037	¾	Steel
Lock-On Hose Barb			
...C20-42L	910035	¼	Steel
/910-C20-44L	910-C20-44L	¾	Steel
Universal Couplers			
No.	No.	Size In.	
/910-UC2-15	910-UC2-15	¼	
/910-UC2-16	910-UC2-16	¼	


Plugs. Heat treated and plated to reduce wear on critical mating surfaces. Interchange with Hansen, Foster, Aro Hi-Lo, and Milton.

Plugs

No.	No.	Size In.	Desc.
Male Pipe Thread			
/910018	910018	¼	Steel
/910020	910020	¾	Steel
Female Pipe Thread			
/910010	910010	¼	Steel
/910012	910012	¾	Steel
Standard Hose Barb			
/910033	910033	¾	Steel
Lock-On Hose Barb			
/910011	910011	¼	Steel
/910-CP21-44L	910-CP21-44L	¾	Steel

COUPLERS & PLUGS

Series ¾"

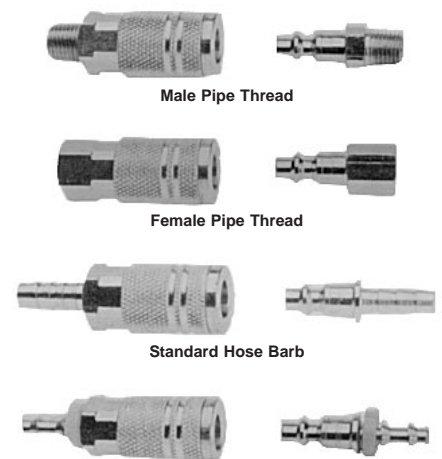

Male Pipe Thread

Female Pipe Thread

Standard Hose Barb

Lock-On Hose Barb

Plated Steel Couplers. Have hardened steel balls and stainless steel springs.

Couplers

No.	No.	Size In.
Male Pipe Thread		
/910038	910038	¼
/910040	910040	¾
Female Pipe Thread		
/910030	910030	¼
/910032	910032	¾
Standard Hose Barb		
/910-C26-44	910-C26-44	¾
Lock-On Hose Barb		
/910-C26-44L	910-C26-44L	¾

Coupler Plugs. Heat treated and plated to reduce wear on critical mating surfaces. Interchange with Hansen, Foster, Aro Hi-Lo, and Milton. Couplers and plugs listed below are intended for use on compressed air lines only. Maximum working pressure of 300 psi.

Plugs

No.	No.	Size In.
Male Pipe Thread		
/910022	910022	¼
/910024	910024	¾
Female Pipe Thread		
/910014	910014	¼
/910016	910016	¾
Standard Hose Barb		
/910-CP25-42	910-CP25-42	¼
/910-CP25-44	910-CP25-44	¾
Lock-On Hose Barb		
/910-CP25-44L	910-CP25-44L	¾

HOSE FITTINGS

Lock-On Splicers - Brass



Designed to work with lock-on hose. Cut hose to length and push fitting into place. Do not use these fittings in conventional hose.

No.	No.	Desc.
/910046	910046	1/4" Hose ID
/910048	910048	3/8" Hose ID

AIR LINE HOSE FITTINGS



All standard hose fittings must be secured to hose with either hose clamp or properly fitted and crimped on ferrule. For use on compressed air only with a minimum working pressure of 300 psi.

Male Fittings

No.	NPT Thrd. In.	Hose ID In.
/910056	1/8	1/4
/910055	1/4	1/4
/910054	3/8	1/4
/910057	1/4	3/8



Two-Piece Swivel Female Fittings

No.	No.	NPT Thrd. In.	Hose ID In.
/910051	910051	1/4	1/4



Splicers

No.	No.	Hose ID In.
/910-602	910-602	3/8
/910050	910050	1/2

HOSE FITTINGS


Adapters & Swivels - Brass

Maximum working pressure 300 psi.




Male Pipe Couplings

No.	No.	Male NPT In.	Female NPT In.
/910070	910070	1/4	1/4
/910078	910078	3/8	1/4
/910074	910074	3/8	3/8



Bushings & Adapters

No.	No.	Male NPT In.	Female NPT In.
/910090	910090	3/8	1/4



Female Tees. Use to run two lines from common feed.

Female Tees

No.	Desc.	NPT In.
/910080	3 Female Threads	1/4
/910086	3 Female Threads	3/8

REUSABLE HOSE FITTINGS

Hose Fittings. Large inside diameter gives greater volume of air. Hose stays in nut when assembling. Check hose OD and ID accurately before ordering.

No.	NPT In.	Hose ID In.	Hose OD In.
/910006	1/4	1/4	19/32
/910007	3/8	3/8	23/32

BLOW GUNS

Special Purpose Series



1/4" female NPT inlet thread and 1/8" NPT female outlet thread. Do not have safety by-pass to prevent build-up of tip pressure. For general purpose use at 30 psi or less. Hang up hook. Accept full range of accessories.

No.	No.	Desc.	Pkg. Qty.
/910091	910091	Standard	1

Note: Blow guns without safety bypass to prevent tip pressure buildup in event of blockage. Comply with OSHA 1910.242b when used on regulated line of 30 psi or less.

MANIFOLDS

3 In 1



Manifold accepts three outlet couplers or hoses. Use to supply three air operated

tools from single supply hose. Mount to pipe at workbench or overhead. Permit three different style couplers on one manifold.

No.	No.	NPT Inlet In.	NPT Outlet In.
/910092	910092	1/4	1/4
/910093	910093	3/8	1/4

BALL FOOT CHUCKS

Brass - Lock-On



For use on live air lines only. Built-in shut-off valve; will not work on inflator gauges. Size, 1/4" NPTF.

No.	No.	Desc.	Pkg. Qty.
/910095	910095	Brass	10

BULK HOSE




No.	ID In.	Desc.	Pressure Rating psi
Vinyl			
/910-AA3832	3/8	25'	...
/910-AA3831	3/8	50'	...
Rubber			
/910325	3/8	25'	300
/910350	3/8	50'	300
/910360	1/4	25'	300
/910370	1/4	50'	300
Push On			
/910-POH14300BL	1/4	Blue	300
/910-POH14300GY	1/4	Gray	300
/910-POH38300BL	3/8	Blue	300
/910-POH38300GY	3/8	Gray	300
/910-POH38300R	3/8	Red	300

IF YOU CAN'T FIND IT HERE . . .

Let us know! Many of the goods and services we can offer are not listed in this catalog. Don't give up looking for the hard-to-find. We are ready to serve you at all times.

IN-LINE OILERS



Automatically lubricates air tools by feeding a measured amount of oil mist each time tool is cycled.

No.	No.	Desc.	NPT Size In.
/910410	910410	For Tools w/Piston Less Than 2" Dia.	1/4
/910420	910420	For Tools w/Piston Over 2" Dia.	3/8

PRESSURE GAUGES

Back Mount



Pressed steel case; shatterproof crystal and brass fitting. For air, water, oil and other fluids compatible with brass and bronze. Available in display packs or boxed. Nominal accuracy 3-2-3%.

No.	Dial Dia. In.	Pipe Thrd. In.	Rge. psi
/910-1101-160	1 1/2	1/8 NPT	0-160
/910-1111-160	2	1/8 NPT	0-160
/910-1112-160	2	1/4 NPT	0-160

AIR REGULATORS

Miniature



For industrial compressed air systems only. Maximum inlet pressure 300 psig. Operating temperature range 0°F to 150°F. Gauge port 2-1/8" NPT, full flow. Outlet range 5-125 psi.

No.	No.	Desc.	Port Size In.
/910-4100	910-4100	Regulator	1/4
/910-4100D	910-4100D	Regulator w/Gauge	1/4

HITACHI® POWER TOOLS

Air Tool Oil



No.	Size Oz.
/910401	8
/910402	16


TOOL OIL

No.	No.	Desc.	Size
/910400	910400	Pneumatic	1 Qt.

CEDARBERG INDUSTRIES

Hose Adapters

Brand X



Hose segment adapters for brand X hoses. Furnished in white.

No.	Hose Size In.	Pkg. Qty.
/7128425-225	1/4	2

CEDARBERG INDUSTRIES


Nozzles

Snap-Loc



Round

No.	NPT Size In.	System Size In.	Pkg. Qty.
/7128425-15	1/8	1/4	4
/7128425-16	1/4	1/4	4
/7128450-14	1/4	1/2	4
/7128450-15	3/8	1/2	4
/7128450-16	1/2	1/2	4

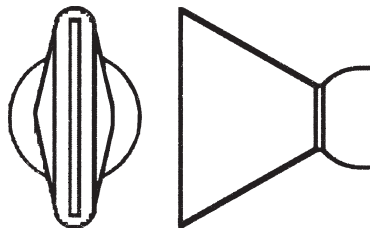

Flare

No. 8425-19. Includes one each In.: 1/16, 1/8, 1/4 round; 1 flare.
No. 8450-19. Includes one each In.: 1/16, 1/8, 1/4 round; 2 flare.

No.	Model No.	NPT Size In.	System Size In.	Pkg. Qty.
/7128425-19	8425-19	1	1/4	2
/7128450-19	8450-19	2	1/2	2

Assortments

No.	System Size In.	Pkg. Qty.
/7128425-13	1/4	2
/7128450-13	1/2	2

CEDARBERG INDUSTRIES

Coolant Hose Systems

Snap-Loc



House body segments snap together to form a flexible, leak-tight hose system for air pressures to 50 psi and fluid pressures to 30 psi. Adjustable length and interchangeable components with easy hand assembly. Chemical resistant; nonconductive. Standard hose of dark gray Delrin 500, polypropylene available; light gray nozzles polypropylene standard, Delrin available; other colors available.

Hose Assemblies

No.	ID In.	Lgth. In.	Contents
/7128425-11	1/4	13	1/16", 1/8", 1/4" Nozzles; 1/8", 1/4" NPT Connectors
/7128450-11	1/2	13	1/4", 3/8", 1/2" Nozzles; 3/8", 1/2" NPT Connectors


Components

No.	Desc.
	1/4" System, 1/4" ID
/7128425-22	50' Bulk Pk.
	1/2" System, 1/2" ID
/7128450-22	50' Bulk Pk.

CEDARBERG INDUSTRIES

Thread Connectors

Snap-Loc



Male hose to male pipe. Delrin 500 material. Light gray. 4/pkg.

No.	NPT Size In.	System Size In.
/7128425-17	1/8	1/4
/7128425-18	1/4	1/4
/7128450-17	3/8	1/2
/7128450-18	1/2	1/2

NAILING • STAPLING • BANDING EQUIPMENT SALES & SERVICE

NAILING & STAPLING FOR CONSTRUCTION & INDUSTRY

- Airo Pneumatic Nailers & Staplers

- Nails & Staples For:

Bostitch

Duofast

Haubold

Hilti

Hitachi


Paslode

Senco

Spenax

Spotnail

Tech Forge

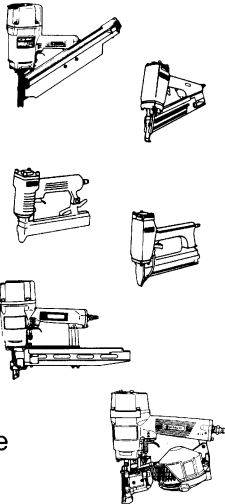

- Hammers, Pliers & Hand Tackers

Bostitch


Rapid

Salco




- Light Wire Staples to Fit All Brands of Staplers

- Hog Rings
- Air Hoses & Fittings
- Air Compressors




STAPLING FOR CORRUGATED BOXES


- Wide Crown Carton Staplers (Air & Manual)




Portable Air Tool/Stick



Portable Roll Tool

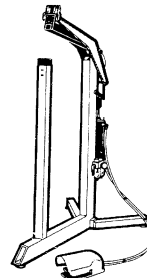

Bottomer/Air Operated



Portable Hand Tool/Stick

STAPLING FOR CORRUGATED BOXES (Cont'd.)

- Staples For:

Acme

Bostitch

Carton Closing Corp.


International

& All Other Brand Staplers

- Staples For Double & Triple Wall Cartons

- Stitchers

- Stitching Wire



BANDING EQUIPMENT & SUPPLIES

- Polypropylene Strapping Buckles & Hand Tools

- Polypropylene Banders Semi Automatic & Automatic

- Steel Banding, Seals & Tools

- Stretch Film: Hand Wrap & Machine Grade